

BMI090L

High-performance longevity Inertial Measurement Unit

GENERAL DESCRIPTION

BMI090L is a high-performance longevity Inertial Measurement Unit (IMU) with extended availability up to 10 years¹. BMI090L is specifically designed to cater the long lifecycles of industrial applications, such as robots and white goods.

BMI090L is part of Bosch Sensortec's
longevity program



BMI090L TARGET APPLICATIONS

- ▶ White goods and appliances (washing machines, power tools)
- ▶ Robots (vacuum cleaners) and drones
- ▶ Precision agriculture
- ▶ IIoT
- ▶ Logistics and asset tracking

SENSOR FEATURES

The 6-axis IMU combines a 16-bit triaxial gyroscope and a 16-bit triaxial accelerometer in a miniature 3 x 4.5 x 0.95 mm³ (16-pin) LGA package. BMI090L features a closed-loop gyro and a robust accelerometer with a built-in mechanical filter to suppress high-frequency vibrations, thus enabling precise orientation and motion tracking in harsh and demanding industrial environments.

BMI090L offers wide acceleration measurement range (from ±3 g to ±24 g), vibration robustness as well as high temperature stability. The automotive-proven gyroscope of the BMI090L has an unmatched bias instability of less than 2 °/h (consumer electronics industry-best) and a low temperature coefficient of offset (TCO) below 15 mdp/s/K. The accelerometer features a low TCO of 0.2 mg/K and low spectral noise of less than 200 µg/sqrt (Hz).


BMI090L provides accurate and reliable inertial sensor data even under demanding conditions, including environments where those conditions change, such as thermal effects like heating, mechanical impacts and stresses such as high shocks, vibrations and PCB bending.

TECHNICAL SPECIFICATIONS

BMI090L Technical data	
Digital resolution	Accelerometer (A): 16-bit Gyroscope (G): 16-bit
Resolution	(A): 0.09 mg (G): 0.004 °/s
Measurement range and sensitivity (calibrated)	(A) ±3 g: 10920 LSB/g ±6 g: 5460 LSB/g ±12 g: 2730 LSB/g ±24 g: 1365 LSB/g (G) ±125 °/s: 262.1 LSB/°/s ±250 °/s: 131.1 LSB/°/s ±500 °/s: 65.5 LSB/°/s ±1000 °/s: 32.8 LSB/°/s ±2000 °/s: 16.4 LSB/°/s
Zero offset (typ. over lifetime)	(A): ± 20 mg (G): ± 1 °/s
TCO	(A): ± 0.2 mg/K (G): ± 0.015 °/s/K
Noise density (typ.)	(A): 190 µg/√Hz (G): 0.014 °/s/√Hz
Bandwidths (progr.)	5 Hz ... 523 Hz
Selectable output data rates	12.5 Hz ... 2 kHz
Digital inputs/outputs	SPI, I ² C 4 x digital interrupts
Supply voltage (V_{DD})	2.4 ... 3.6 V
I/O supply voltage (V_{DDIO})	1.2 ... 3.6 V
Temperature range	-40 ... +85 °C
Current consumption (full operation, A+G)	5.15 mA
LGA package	3 x 4.5 x 0.95 mm ³

¹ Starting from product introduction; see longevity disclaimer in data sheet

Pin configuration

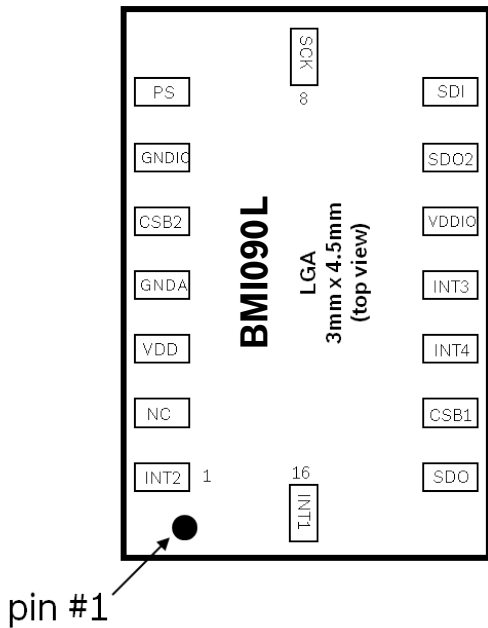

Pin description

Pin no.	Name
1	INT2 (Accelerometer)
2	NC
3	V _{DD}
4	GNDA
5	CSB2 (Gyroscope)
6	GND _{IO}
7	PS
8	SCx
9	SDx
10	SDO2 (Gyroscope)
11	V _{DDIO}
12	INT3 (Gyroscope)
13	INT4 (Gyroscope)
14	CSB1 (Accelerometer)
15	SDO1 (Accelerometer)
16	INT1 (Accelerometer)

Note: BMI090L is pin-to-pin compatible with BMI088 and BMI085.

SYSTEM COMPATIBILITY

The BMI090L is designed for best possible fit into modern embedded consumer electronics devices. The sensor has very wide ranges for V_{DD} and V_{DDIO} supply voltages. The performance and the current consumption are stable over the whole voltage supply range. BMI090L provides two digital serial interfaces: I²C and SPI.

The high robustness of the sensor gives the user more freedom in placing the sensor on a PCB and can help to reduce the design effort and costs on system level, for example by omitting additional damping structures or freeing up space when considering heat sources or thermal distributions across the PCB. Depending on the application needs, the sensor may also allow to reduce calibration effort at end-of-line tests.

BMI090L features a 1 kB FIFO and provides synchronized data (accelerometer data at an ODR of 2 kHz). BMI090L supports the following industry-relevant features:

- a. Any motion/no motion
- b. Orientation
- c. High g/low g

Together with the barometric pressure sensor BMP388 and the magnetometer BMM150, the BMI090L is part of a comprehensive 7-DoF/10-DoF solution from Bosch Sensortec, allowing for additional features like precise altitude measurement and accurate heading calculation.

Headquarters
Bosch Sensortec GmbH
 Gerhard-Kindler-Straße 9
 72770 Reutlingen · Germany
 Telephone +49 7121 3535 900
 Fax +49 7121 3535 909

www.bosch-sensortec.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bosch:](#)

[BMI090L](#) [BMI090L Shuttle Board](#)